

UYF型功率铁氧体产品系列

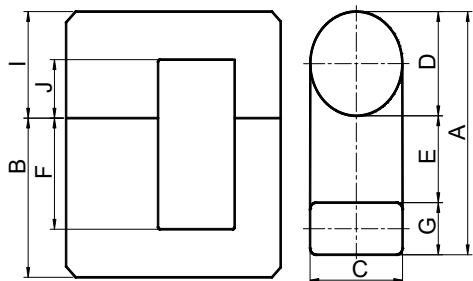


Fig.1

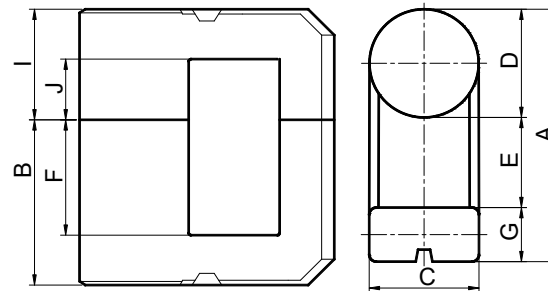


Fig.2

规格Type	图形Fig	尺寸Dimensions(mm)							有效参数Effective parameter			电感系数AL(nH/N ²)		重量(克/付)
		A	B/I	C/C1/C2	D/D1	D2/G	E	F/H	Ae(mm ²)	Le(mm)	Ve(mm ³)	BP44	BP95	Wt(g/set)
UYF37	1	37.2 ^{+0.3} _{-0.1}	B:32.2±0.1 I:16.7±0.1	16.2±0.1	16±0.15	6±0.2	15±0.5	F:26.30±0.15 J:10.80±0.15	110.3	120.1	13247.03	2400±25%	±25%	91.20
UYF42	2	42±0.5	B: 5.3±0.2 I: 16.5±0.2	18±0.3	18±0.3	9±0.2	14.4min	F: 29±0.2 J: 8.5±0.2	169.52	138.8	23529.38	3600±25%	5600±25%	136.10

注: AL值测试条件:1KHz、0.3V、100Ts。(Remark:Testing conditon for AL:1KHz、0.3V、100Ts.)

以上为本公司标准规格,可根据客户特殊要求进行设计。(The above is the usually type, we can redesign according to costomer's request.)