




规格Type	图形Fig	尺寸Dimensions(mm)							有效参数Effective parameter			电感系数AL(nH/N <sup>2</sup> )		重量(克/付)	
		A	B	C	D/D1/D2	E	F	G	Ae(mm <sup>2</sup> )	Le(mm)	Ve(mm <sup>3</sup> )	BP44	BP95	BP44	BP95
PQ16.4/11	1	16.4±0.35	5.35±0.15	11.2±0.30	7.0±0.25	14.00 min	3.00±0.15	9.60 min	38	25.8	980.4	2600±25%	3200±25%	5.6	
PQ19.9/16	4	19.9±0.40	7.95±0.15	14.1±0.30	10.2±0.25 6.80±0.20	17.20 min	5.10±0.15	11.9 min	60.5	36.8	2226.4	2600±25%	5800±25%	12.2	13.80
PQ20/16	1	20.6±0.40	8.3±0.15	14.0±0.40	8.8±0.20	18.00 min	5.50±0.20	13.0 min	56.00	39.10	2189.60	3200±25%	4000±25%	12.1	13.60
PQ20/20	1	20.6±0.40	10.5±0.15	14.0±0.40	8.8±0.20	18.00 min	7.70±0.20	13.0 min	56.20	47.85	2689.17	2600±25%	3300±25%	14.2	16.00
PQ20/12-1	1	20.5±0.40	6.0±0.15	14.0±0.40	8.8±0.20	17.60 min	3.00±0.15	12.0 min	57.22	29.70	1699.43	3800±25%	4600±25%	10.7	12.60
PQ20/12.8-4	1	20.7±0.40	6.45±0.15	14.1±0.40	8.85±0.20	17.80 min	3.90±0.20	12.8 min	57.93	32.08	1858.39	2900±25%	3800±25%	10.6	12.20
PQ20/20F	1	20.5±0.40	10.1±0.15	14.0±0.40	8.80±0.20	18.0±0.40	7.15±0.20	12.0 min	61.00	45.60	2781.60	2700±25%	3500±25%	15.0	16.80
PQ20.8/20	1	20.8±0.40	10.55±0.15	13.8±0.35	8.80±0.20	18.4 min	7.50±0.20	14.5 min	57.10	47.90	2735.09	2500±25%	3200±25%	14.8	18.60
PQ21/16	1	21.3±0.40	8.3±0.15	14.0±0.40	8.8±0.20	18.70 min	5.50±0.20	13.0 min	60.30	39.40	2377.80	3000±25%	4200±25%	13.2	15.00
PQ21/20	1	21.3±0.40	10.5±0.15	14.0±0.40	8.8±0.20	18.70 min	7.70±0.20	13.0 min	60.60	48.20	2922.20	2500±25%	3200±25%	15.8	17.80
PQ22/16	1	22.2±0.40	8.3±0.15	14.0±0.40	8.8±0.20	19.50 min	5.50±0.20	14.3 min	58.00	40.50	2349.00	3000±25%	4000±25%	13.1	15.00
PQ22/20	1	22.2±0.40	10.5±0.15	14.0±0.40	8.8±0.20	19.50 min	7.70±0.20	14.3 min	57.42	49.54	2844.59	2500±25%	3000±25%	15.6	17.50
PQ25/17	6	25.0±0.40	8.50±0.15	18.0±0.30	11.0±0.20	22.1±0.40	5.50±0.20	16.8 min	95.80	44.50	4263.00	5300±25%	6500±25%	21.0	24.10
PQ26/20	1	26.5±0.45	10.35±0.15	19.0±0.45	12.0±0.20	22.5±0.45	6.0±0.20	15.5 min	119.00	46.30	5490.00	5250±25%	6400±25%	31.00	34.70
PQ26/25	1	26.5±0.45	12.55±0.15	19.0±0.45	12.0±0.20	22.5±0.45	8.2±0.20	15.5 min	118.00	55.50	6530.00	4800±25%	6000±25%	36.20	40.50
PQ26/28	1	26.5±0.45	14.0±0.15	19.0±0.45	12.0±0.20	22.5±0.45	9.80±0.20	15.5 min	118.00	61.00	7198.00	4600±25%	5500±25%	39.60	43.30
PQ26/30	1	26.5±0.45	15.0±0.20	19.0±0.45	12.0±0.20	22.5±0.45	10.70±0.20	15.5 min	118.00	64.70	7635.00	4500±25%	5500±25%	41.30	45.40
PQ26/20-1	1	26.6 <sup>+0.6</sup> <sub>-0.20</sub>	10.35±0.15	19.0±0.45	12.0±0.20	22.60 min	6.0±0.20	15.8 min	117.00	46.30	5417.10	5500±25%	6500±25%	30.50	34.60
PQ26/20-3	1	26.5±0.45	10.07±0.15	19.0±0.45	12.0±0.20	22.5±0.45	5.75±0.20	16.5±0.5	119.00	46.30	5509.70	5250±25%	6400±25%	31.00	34.60

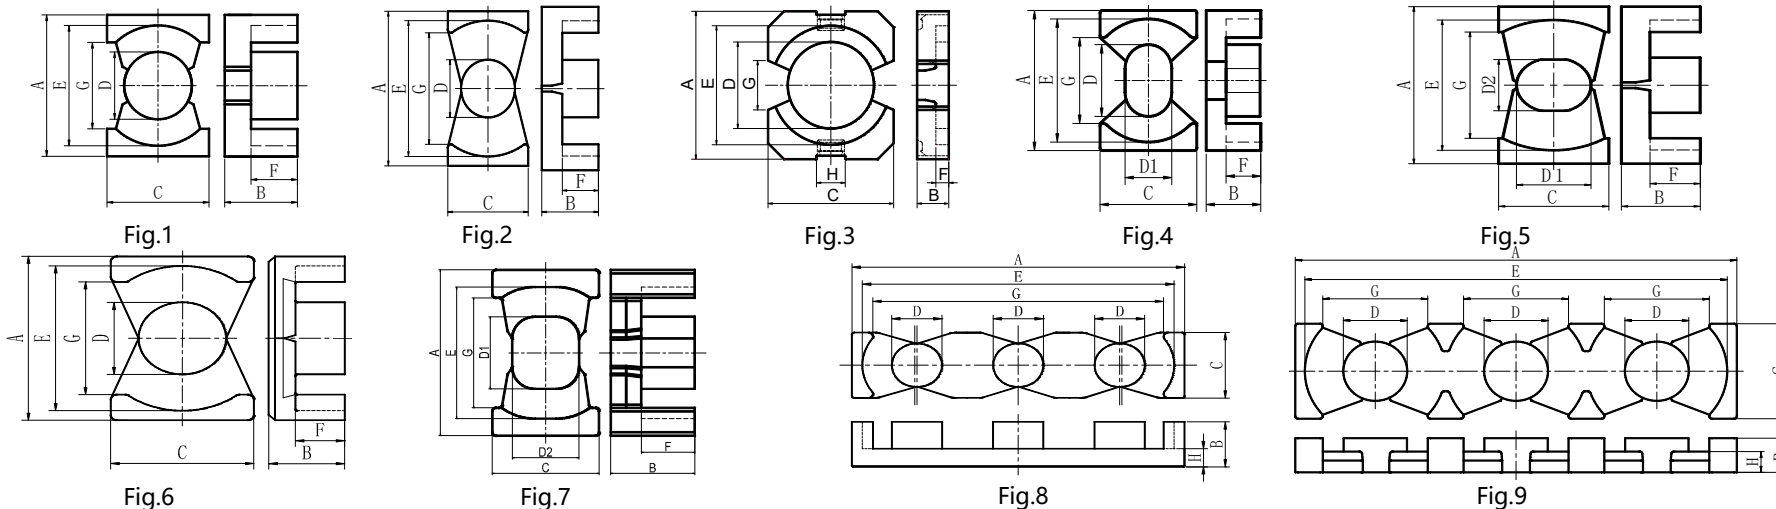

规格Type	图形Fig	尺寸Dimensions(mm)							有效参数Effective parameter			电感系数AL(nH/N <sup>2</sup> )		重量(克/付)	
		A	B	C	D/D1/D2	E	F	G	Ae(mm <sup>2</sup> )	Le(mm)	Ve(mm <sup>3</sup> )	BP44	BP95	BP44	BP95
PQ26/25-3	1	26.5±0.45	12.37±0.15	19.0±0.45	12.0±0.20	22.5±0.45	8.05±0.20	16.5±0.5	118.00	55.50	6549.00	4600±25%	5500±25%	36.00	40.00
PQ26/20-4	2	26.8±0.45	10.45±0.15	19.0±0.46	12.0±0.20	22.95±0.50	6.1 ±0.20	17.5±0.5	117.60	47.11	5540.20	5400±25%	6500±25%	31.20	34.30
PQ26/25-4	2	26.8±0.45	12.50±0.15	19.0±0.46	12.0±0.20	22.95±0.50	8.1 ±0.20	17.5±0.5	117.90	55.16	6503.36	4600±25%	5800±25%	35.50	40.00
PQ27/20A	1	27.5±0.45	10.35±0.15	19.0±0.45	12.0±0.20	22.70 min	6.0±0.20	17.2 min	120.80	47.00	5670.80	5200±25%	6500±25%	31.80	34.90
PQ27/25A	1	27.5±0.45	12.55±0.15	19.0±0.45	12.0±0.20	22.70 min	8.2±0.20	17.2 min	120.80	55.80	6728.60	4500±25%	5500±25%	36.60	40.90
PQ27/30A	1	27.5±0.45	15.15±0.15	19.0±0.45	12.0±0.20	22.70 min	10.65±0.20	17.2 min	120.80	65.80	7948.64	4000±25%	5000±25%	43.70	46.00
PQ27/20-2	1	27.5±0.45	10.35±0.15	19.0±0.45	12.1±0.20	23.10 min	6.0±0.20	17.20min	114.90	47.50	5457.70	5200±25%	6500±25%	30.40	33.90
PQ27/25-2	1	27.5±0.45	12.55±0.15	19.0±0.45	12.1±0.20	23.10 min	8.2±0.20	17.2 min	114.70	56.00	6423.20	4500±25%	5500±25%	35.60	38.80
PQ27/20-4	1	27.1±0.50	10.2±0.15	19.0±0.45	11.85±0.2	23.00 min	6.05±0.20	17.0 min	112.07	47.14	5283.00	5000±25%	6500±25%	29.00	32.80
PQ27/20-5	1	27.0±0.50	10.2±0.15	18.8±0.45	11.80±0.2	23.80 min	6.00±0.20	17.8 min	109.40	47.41	5186.65	4500±25%	5500±25%	29.00	32.40
PQ32/20A	1	32.0±0.50	10.50±0.20	22.0±0.50	13.45±0.25	27.5±0.50	6.0±0.20	20.0 min	161.00	55.40	8920.00	5500±25%	6800±25%	42.10	47.20
PQ32/25A	1	32.0±0.50	12.6±0.20	22.0±0.50	13.45±0.25	27.5±0.50	8.20±0.20	20.0 min	160.00	65.00	10400.00	5000±25%	6250±25%	48.00	53.60
PQ32/27A	1	32.0±0.50	13.40±0.20	22.0±0.50	13.45±0.25	27.5±0.50	8.90±0.20	20.0 min	161.00	68.20	10980.20	5000±25%	6200±25%	50.40	56.50
PQ32/30A	1	32.0±0.50	15.4±0.15	22.0±0.50	13.45±0.25	27.5±0.50	10.90±0.20	20.0 min	161.00	78.08	12571.50	4600±25%	6000±25%	56.00	61.50
PQ32/20	1	32.0±0.50	10.55±0.15	22.0±0.50	13.45±0.25	27.5±0.50	6.0±0.20	19.0 min	161.00	58.50	9420.00	5500±25%	6800±25%	42.50	47.50
PQ32/25	1	32.0±0.50	12.6±0.20	22.0±0.50	13.45±0.25	27.5±0.50	8.20±0.20	19.0 min	160.80	62.70	10096.90	5000±25%	6250±25%	47.80	53.30
PQ32/30	1	32.0±0.50	15.3±0.15	22.0±0.50	13.45±0.25	27.5±0.50	10.75±0.20	19.0 min	161.00	74.60	12000.00	4500±25%	6000±25%	56.00	61.88
PQ32/35A	1	32.0±0.50	17.8±0.15	22.0±0.50	13.45±0.25	27.5±0.50	13.25±0.20	20.0 min	161.00	86.55	13934.20	4200±25%	5500±25%	64.00	69.80
PQ32/50.36A	1	32.0±0.50	25.18±0.15	22.0±0.50	13.45±0.25	27.5±0.50	20.65±0.20	20.0 min	161.50	119.70	19331.55	3200±25%	4000±25%	85.00	92.50
PQ33/21	1	33.0±0.50	10.6±0.20	21.5±0.30	13.00±0.30	28.50 min	6.30±0.20	22.3 min	142.00	58.20	8264.40	5500±25%	6800±25%	40.00	43.90

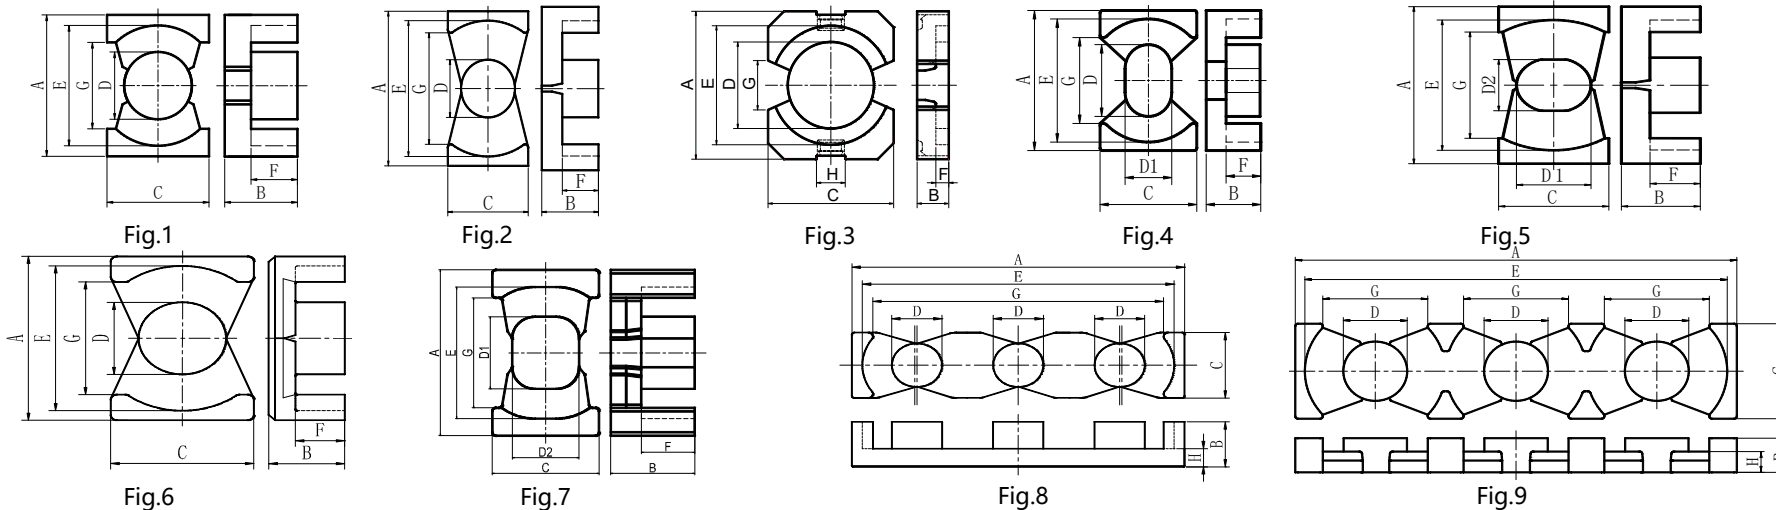

规格Type	图形Fig	尺寸Dimensions(mm)							有效参数Effective parameter			电感系数AL(nH/N <sup>2</sup> )		重量(克/付)	
		A	B	C	D/D1/D2	E	F	G	Ae(mm <sup>2</sup> )	Le(mm)	Ve(mm <sup>3</sup> )	BP44	BP95	BP44	BP95
PQ33/21A	1	33.2±0.50	10.60±0.20	22.0±0.50	13.45±0.25	28.10 min	6.30±0.30	20.5 min	159.20	57.38	9134.90	6000±25%	7000±25%	42.80	47.70
PQ33/25A	1	33.2±0.50	12.60±0.20	22.0±0.50	13.45±0.25	28.10 min	8.30±0.30	20.5 min	160.00	66.12	10579.20	5500±25%	6800±25%	49.30	53.30
PQ33/30A	1	33.2±0.50	15.30±0.20	22.0±0.50	13.45±0.25	28.10 min	11.00±0.30	20.5 min	160.80	77.92	12529.54	4600±25%	6000±25%	57.00	61.80
PQ33/35A	1	33.2±0.50	17.8±0.20	22.0±0.50	13.45±0.25	28.10 min	13.25±0.30	20.5 min	161.00	88.40	14232.40	4200±25%	5500±25%	64.70	70.70
PQ34/14.8	3	34.0±0.60	7.35±0.15	29±0.6	20±0.30	26.7 min	3.00±0.2	G:8.9min H:6.5±0.3/-0	276.90	46.17	12785.10	-	18000±25%	55.20	63.70
PQ35/25	1	35.2±0.60	12.55±0.20	26.0±0.50	14.30±0.30	31.50 min	7.65±0.30	23.5 min	181.40	67.00	12153.80	6000±25%	7200±25%	60.50	67.80
PQ35/30	1	35.2±0.60	15.0±0.20	26.0±0.50	14.30±0.30	31.50 min	10.10±0.20	23.5 min	181.40	77.80	14112.92	5000±25%	6800±25%	65.50	71.30
PQ35/35	1	35.2±0.60	17.5±0.20	26.0±0.50	14.30±0.30	31.50 min	12.60±0.30	23.5 min	181.40	88.80	16108.32	4800±25%	6000±25%	72.00	78.90
PQ35/40	1	35.2±0.60	20.0±0.20	26.0±0.50	14.30±0.30	31.50 min	15.10±0.30	23.5 min	181.40	99.80	18103.72	4500±25%	5800±25%	82.00	90.00
PQ38/13	2	38.3±0.50	6.55±0.15	21.32±0.40	14.30±0.25	33.30 min	3.45±0.20	26.9 min	131.90	47.30	6248.80	6500±25%	8000±25%	30.70	36.00
PQ40/13	2	40.5±0.65	6.85±0.20	21.0±0.40	14.30±0.25	33.00 min	3.75±0.25	27.0 min	139.40	48.50	6767.30	6500±25%	8000±25%	33.90	40.20
PQ40/25	1	40.6±0.70	12.5±0.20	28.0±0.50	15.00±0.35	36.10 min	7.35±0.20	28.0 min	205.20	71.00	14569.20	6500±25%	8000±25%	69.20	74.10
PQ40/30	1	40.6±0.70	15.0±0.20	28.0±0.50	15.00±0.35	36.10 min	9.85±0.20	28.0 min	205.20	82.10	16846.92	5800±25%	6800±25%	79.00	84.30
PQ40/35	1	40.6±0.70	17.5±0.20	28.0±0.50	15.00±0.35	36.10 min	12.35±0.20	28.0 min	205.20	93.05	19093.86	4800±25%	6000±25%	88.20	94.50
PQ40/40	1	40.6±0.70	20.2±0.20	28.0±0.50	15.00±0.35	36.10 min	15.05±0.20	28.0 min	205.20	104.90	21525.48	4300±25%	5500±25%	97.80	104.70
PQ45/45	1	45.0±0.80	22.5±0.30	30.0±0.50	17.00±0.30	39.80 min	16.50±0.30	29.2 min	263.50	115.10	30328.85	5500±25%	7000±25%	133.00	147.70
PQ46/44	7	46.0±0.85	22.0±0.30	28.0±0.50	D1=20±0.35 D2=17.5±0.3	35.70 min	14.00±0.30	29.7 min	337.20	95.60	32236.32	8000±25%	11000±25%	168.00	181.20
PQ50/30	1	50.3±0.70	15.20±0.25	32.0±0.60	20.0±0.35	43.60 min	8.30±0.30	33.0 min	316.30	76.40	24165.32	8500±25%	12000±25%	138.00	152.50
PQ50/35	1	50.3±0.70	17.50±0.25	32.0±0.60	20.0±0.35	43.60 min	10.60±0.30	33.0 min	316.40	85.60	27083.84	8500±25%	10000±25%	153.00	166.80

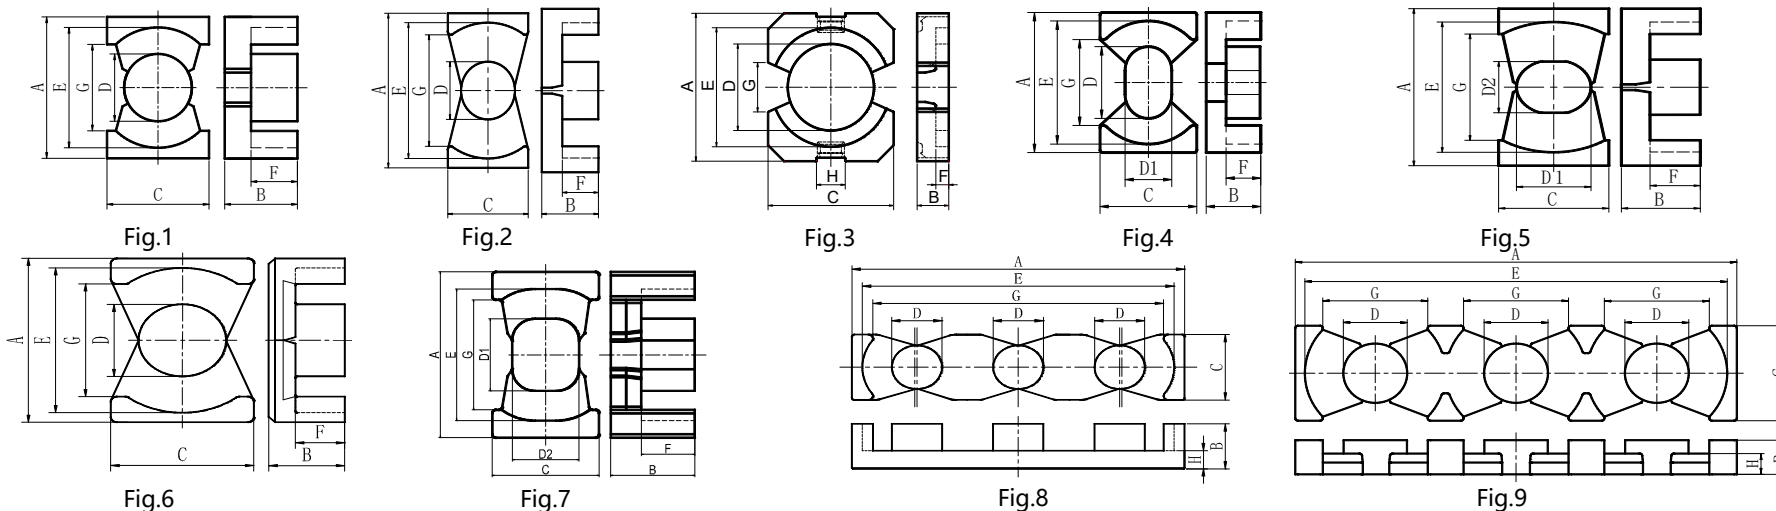

规格Type	图形Fig	尺寸Dimensions(mm)							有效参数Effective parameter			电感系数AL(nH/N <sup>2</sup> )		重量(克/付)	
		A	B	C	D/D1/D2	E	F	G	Ae(mm <sup>2</sup> )	Le(mm)	Ve(mm <sup>3</sup> )	BP44	BP95	BP44	BP95
PQ50/40	1	50.3±0.70	20.2±0.25	32.0±0.60	20.0±0.35	43.60 min	13.30±0.30	33.0 min	316.40	96.30	30469.32	8000±25%	9500±25%	167.00	184.30
PQ50/45	1	50.3±0.70	22.5±0.25	32.0±0.60	20.0±0.35	43.60 min	15.6±0.30	33.0 min	316.50	105.50	33390.75	7500±25%	9000±25%	181.50	198.60
PQ50/50	1	50.3±0.70	25.0±0.25	32.0±0.60	20.0±0.35	43.60 min	18.10±0.30	33.0 min	316.50	115.50	36555.75	6900±25%	8500±25%	196.00	218.00
PQ51/34	5	51.5±0.70	17.00±0.20	32.5±0.60	D1=21.9±0.35 D1=20.9±0.35	44.10 min	10.70±0.25	33.5 min	339.70	84.50	28704.65	12000±25%	15000±25%	160.60	173.20
PQ60/34	2	60.5±1.00	17.1±0.20	38.0±0.70	25.3±0.50	51.70 min	9.90±0.20	39.7 min	453.50	88.50	40134.75	11000±25%	14000±25%	222.00	239.50
PQ61/56	5	61.0+1.2/-0.9	28.0±0.30	30.0±0.70	25.0±0.50	52.10 min	20.00±0.30	41.0 min	390.00	128.50	50115.00	8800±25%	11000±25%	294.00	327.00
PQ65/50	1	65.0±1.00	25.0±0.30	40.0±0.70	26.0±0.50	53.0±1.00	16.00±0.30	40.0±0.80	576.50	116.00	66874.00	11000±25%	14000±25%	375.00	404.00
PQ65/60	1	65.0±1.00	30.0±0.30	40.0±0.70	26.0±0.50	53.0±1.00	21.00±0.30	40.0±0.80	576.50	135.50	78115.75	9800±25%	12500±25%	375.00	465.60
PQ79/24.8	8	79.0±1.00	12.4±0.20	18.0±0.40	12.0±0.30	74.4±1.00	H=5.0±0.30	69.4±1.00	113.00	-	-	5200±25%	6500±25%	92.00	105.50
PQ138/23	9	138.0±2.50	11.5±0.30	32.0±0.80	20.0±0.60	132.0±2.5	H=4.5±0.30	32.0 min	314.00	-	-	8800±25%	11000±25%		

注: AL值测试条件:1KHz、0.3V、100Ts。(Remark:Testing conditon for AL:1KHz、0.3V、100Ts.)

以上为本公司标准规格,可根据客户特殊要求进行设计。(The above is the usually type, we can redesign according to costomer's request)