

Fig. 1

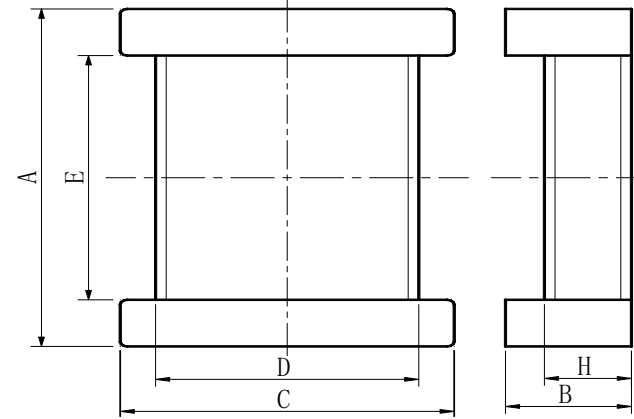


Fig. 2

规格Type	图形Fig	尺寸Dimensions(mm)						有效参数Effective parameter			电感系数AL(nH/N ²)		重量(克/付)
		A	B	C/C1/C2	D	E	F/H	Ae(mm ²)	Le(mm)	Ve(mm ³)	BP44	BP95	Wt(g/set)
UU6.5/9.3	1	6.5±0.2	4.65±0.2	10.1±0.25	2.1±0.15	2.3±0.2	2.50±0.15	22.58	20.95	473.05	1600±25%	2100±25%	3.00
UU8.5/10.6	1	8.5±0.2	5.3±0.2	22.9±0.3	2.75±0.15	3±0.2	3.25±0.15	68.64	24.3	1667.95	4000±25%	5200±25%	10.60
UU15.69.4	1	15.6±0.3	4.7±0.15	13±0.3	4.0±0.15	7.6±0.3	0.90±0.15	50.2	31.04	1558.21	3000±25%	3800±25%	10.65
UU15.69.4	1	15.6±0.3	4.7±0.15	25.6±0.3	4.0±0.15	7.6±0.3	0.90±0.15	98.82	31.04	3067.37	3000±25%	3800±25%	21.10
UU15.611.2	1	15.6±0.3	5.6±0.15	25.6±0.3	4.0±0.15	7.6±0.3	1.60±0.15	102.0	34.2	3488.40	3000±25%	3800±25%	21.10
UU1612	1	16±0.3	6±0.15	18±0.4	4.5±0.15	7±0.3	2.00±0.15	75.4	35.3	2661.62	3300±25%	5000±25%	15.00
UU2915	1	29±0.5	7.8±0.1	25+0.3/-0.5	/	23.8min	5.35±0.15	60.8	77.45	4708.96	2200±25%	3000±25%	31.90
UU2920	1	29±0.5	10.3±0.1	25+0.3/-0.5	/	23.8min	7.85±0.15	60.7	87.5	5311.25	2000±25%	2800±25%	31.90
UU30	1	30±0.5	4.6±0.15	26±0.4	5.0±0.15	20±0.5	0.75±0.15	104.1	56.6	5892.06	4000±25%	5800±25%	36.20
UU72	2	72.2±0.6	17.8±0.4	47.2±0.5	37.2±0.5	48.2±0.5	12.30±0.30	460.00	158.40	72864.00	9500±25%	11500±25%	

注: AL值测试条件:1KHz、0.3V、100Ts。(Remark:Testing conditon for AL:1KHz、0.3V、100Ts.)

以上为本公司标准规格, 可根据客户特殊要求进行设计。(The above is the usually type, we can redesign according to costomer's request.)