

Fig.1

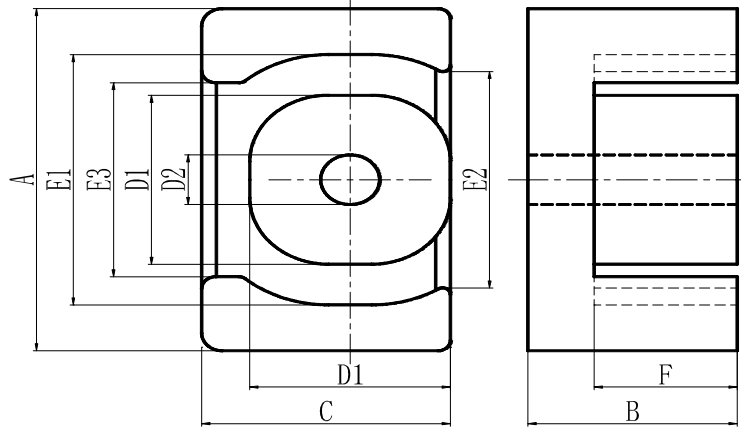


Fig.2

规格Type	图形Fig	尺寸Dimensions(mm)							有效参数Effective parameter			电感系数AL(nH/N ²)		重量(克/付)
		A	B	C	D/D1/D2	E1	E2/E3	F	Ae(mm ²)	Le(mm)	Ve(mm ³)	BP44	BP95	Wt(g/set)
ECW40/27	1	40±0.6	13.50±0.15	32±0.5	18.8±0.3	36.0±0.6	25.0min	9.00±0.20	274.75	71.90	19754.53	9000±25%	11000±25%	111.00
ECW49/50.5	2	49±0.7	25.25±0.2	30±0.5	D1:24.2±0.4 D2:7.1±0.25	35.85±0.7	E2:31.0±0.7 E3:27.8±0.7	17.25±0.25	463.90	107.80	50008.42	12000±25%	14500±25%	285.00

注: AL值测试条件:1KHz、 0.3V、 100Ts 。(Remark:Testing conditon for AL:1KHz、 0.3V、 100Ts.)

以上为本公司标准规格, 可根据客户特殊要求进行设计。(The above is the usually type, we can redesign according to costomer's request.)