

Fig.1

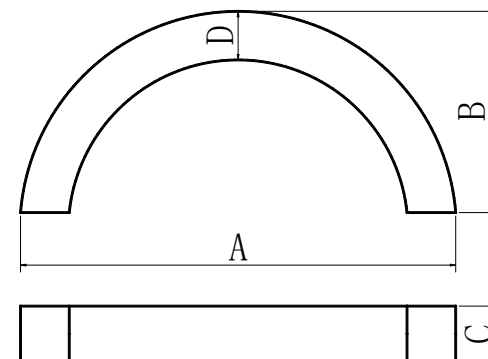


Fig.2

规格Type	图形 Fig.	尺寸Dimensions(mm)				抗压强度 (N)	Q值	电感系数AL(nH/N ²)	重量(克/只)
		A	B	C	D	Strength (N)	Q	BP40	Wt(g/set)
C14×5×11	1	14.37±0.5	/	11.00±0.25	5.00±0.20	≥200	/	/	3.60
C25.2×10.5×4.5	1	25.20±0.2	/	10.5+0.5/-0	4.50±0.10	≥200	≥1.35	≥400	6.00
C46×4×11	1	38.60±0.4	/	11.00±0.30	4.00±0.20	≥160	/	/	7.90
C64.8×30×8	2	64.8±0.50	30±1	8.00±0.20	7.00±0.20	/	/	/	26.00

注: 1. AL值测试条件:1KHz、 0.3V、 100Ts。(Remark:Testing conditon for AL:1KHz、 0.3V、 100Ts.)

2.Q值测试条件:1KHz、 1V、 100Ts。(Q:Testing conditon for AL:1KHz、 1V、 100Ts.)

3.抗压强度测试条件: 测试间距40mm, 测试速度: 30mm/mim.

以上为本公司标准规格, 可根据客户特殊要求进行设计。(The above is the usually type, we can redesign according to costomer's request.)