

LEP型功率铁氧体产品系列

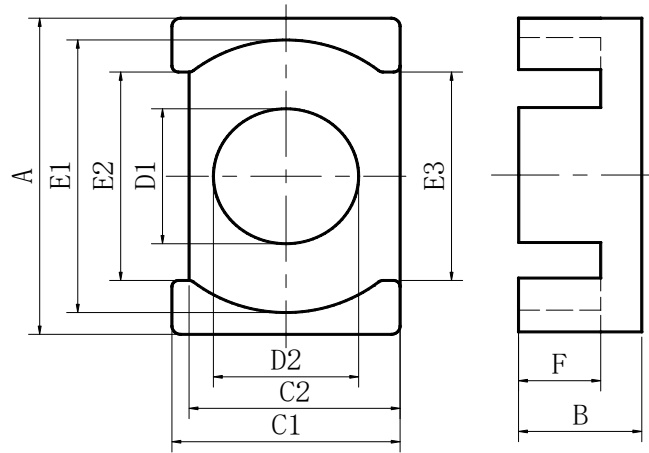


Fig.1

规格 Type	图形 Fig	尺寸Dimensions(mm)										有效参数Effective parameter			电感系数AL(nH/N ²)		重量(克/付)
		A	B	C1	C2	D1	D2	E1	E2	E3	F	Ae(mm ²)	Le(mm)	Ve(mm ³)	BP44	BP95	Wt(g/set)
LEP25	1	25±0.5	8±0.15	21±0.5	17.1±0.5	12.2±0.25	12.4±0.25	21.2±0.5	16±0.5	14.8±0.5	4.9±0.15	125.6	35.90	4509.0	8000±25%	9500±25%	25.60

注: AL值测试条件:1KHz、0.3V、100Ts。(Remark:Testing conditon for AL:1KHz、0.3V、100Ts.)

以上为本公司标准规格,可根据客户特殊要求进行设计。(The above is the usually type, we can redesign according to costomer's request.)