

## LP型功率铁氧体产品系列

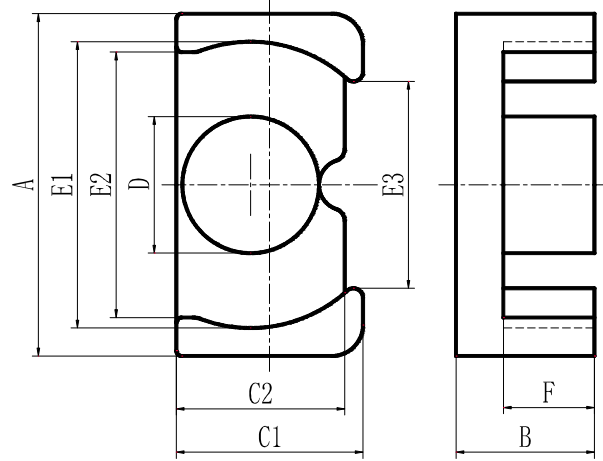


Fig. 1

规格 Type	图形 Fig	尺寸Dimensions(mm)									有效参数Effective parameter			电感系数AL(nH/N <sup>2</sup> )		重量(克/付)
		A	B	C1	C2	D	E1	E2	E3	F	Ae(mm <sup>2</sup> )	Le(mm)	Ve(mm <sup>3</sup> )	BP44	BP95	Wt(g/set)
LP22	1	22±0.35	8.9±0.15	12±0.25	10.82±0.3	8.8±0.2	18.3±0.3	16.98±0.35	13.2±0.35	5.85±0.15	62.2	42.70	2655.9	3500±25%	4300±25%	15.70

注: AL值测试条件:1KHz、 0.3V、 100Ts 。(Remark:Testing conditon for AL:1KHz、 0.3V、 100Ts. )

以上为本公司标准规格, 可根据客户特殊要求进行设计。(The above is the usually type, we can redesign according to costomer's request.)