

QP型功率铁氧体产品系列

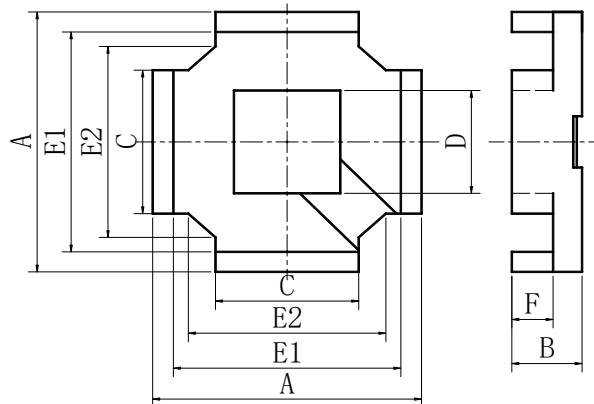


Fig.1

规格Type	图形Fig	尺寸Dimensions(mm)							有效参数Effective parameter			电感系数AL(nH/N ²)		重量(克/付)
		A	B	C	D	E1	E2	F	Ae(mm ²)	Le(mm)	Ve(mm ³)	BP44	BP95	Wt(g/set)
QP26/12	1	26±0.40	6.0±0.2	14+0.2/-0.3	10.5±0.2	21.50min	19.20ref	3.5±0.2	115.0	39.4	4531.00	7200±25%	9500±25%	21.80
QP29/13	1	29±0.45	6.7±0.2	16.4±0.25	12.0±0.2	23.80min	22.50ref	3.6±0.2	155.0	49.4	7657.00	9200±25%	12000±25%	33.40

注: AL值测试条件:1KHz、 0.3V、 100Ts 。(Remark:Testing conditon for AL:1KHz、 0.3V、 100Ts.)

以上为本公司标准规格, 可根据客户特殊要求进行设计。(The above is the usually type, we can redesign according to costomer's request.)