

SZ型功率铁氧体产品系列

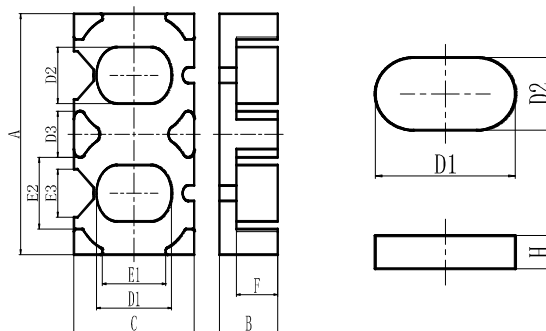


Fig.1

规格Type	图形Fig	尺寸Dimensions(mm)											有效参数Effective parameter			电感系数AL(nH/N ²)		重量(克/付)
		A	B	C	D1	D2	D3	E1	E2	E3	F	H	Ae(mm ²)	Le(mm)	Ve(mm ³)	BP90	BP96	Wt(g/set)
SZ47/15.5/32	1	47±0.7	15.5±0.15	32±0.5	20±0.3	11±0.2	9±0.2	16.9±0.5	14±0.4	9.38±0.3	11±0.15	5±0.05	194	106.8	20726.96	5000±25%	8500±25%	137.00

注: AL值测试条件:1KHz、0.3V、100Ts。(Remark:Testing conditon for AL:1KHz、0.3V、100Ts.)

以上为本公司标准规格, 可根据客户特殊要求进行设计。(The above is the usually type, we can redesign according to costomer's request.)