

UR型功率铁氧体产品系列

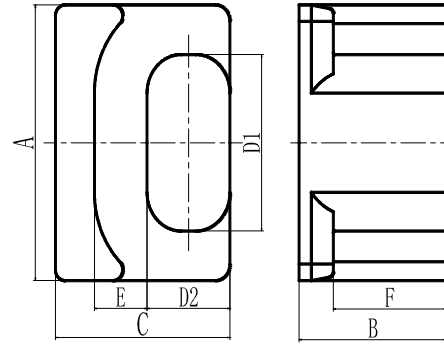


Fig. 1

规格Type	图形Fig	尺寸Dimensions(mm)							有效参数Effective parameter			电感系数AL(nH/N ²)		重量(克/付)
		A	B/l	C/C1/C2	D/D1	D2/G	E	F/H	Ae(mm ²)	Le(mm)	Ve(mm ³)	BP44	BP95	Wt(g/set)
UR50/18/35.8	3	50±0.7	18.00±0.15	35.8±0.5	32±0.55	17±0.25	10.5min	11.0±0.2	501.9	89	44669.10	10000±25%	12500±25%	244.00
UR50/20.25/35.8	3	50±0.7	30.25±0.3	35.8±0.5	32±0.55	17±0.25	10.5min	23.25±0.3	501.9	134.5	67505.00	7600±25%	9500±25%	362.50

注: AL值测试条件:1KHz、 0.3V、 100Ts。(Remark:Testing conditon for AL:1KHz、 0.3V、 100Ts.)

以上为本公司标准规格, 可根据客户特殊要求进行设计。(The above is the usually type, we can redesign according to costomer's request.)