

ECO型功率铁氧体产品系列

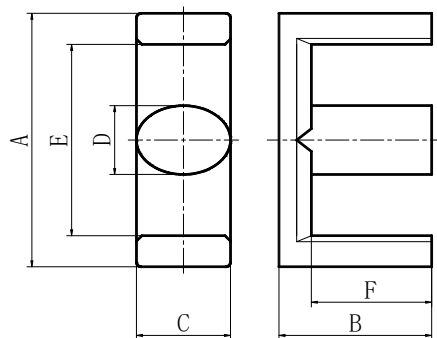


Fig.1

规格Type	图形Fig	尺寸Dimensions(mm)						有效参数Effective parameter			电感系数AL(nH/N ²)		重量(克/付)
		A	B	C	D	E	F	Ae(mm ²)	Le(mm)	Ve(mm ³)	BP44	BP95	Wt(g/set)
ECO2121	1	21.20±0.4	10.70±0.2	7.70±0.20	5.75±0.2	16.0±0.40	8.30±0.20	36.73	51.30	1884.25	1900±25%	2350±25%	11.00
ECO2124	1	21.20±0.4	12.10±0.2	7.70±0.20	5.75±0.2	16.0±0.40	9.70±0.20	36.73	56.85	2088.10	1850±25%	2300±25%	12.20
ECO2125	1	21.20±0.4	12.60±0.2	7.70±0.20	5.75±0.2	16.0±0.40	9.80±0.20	36.90	57.70	2129.13	1800±25%	2300±25%	13.00

注: AL值测试条件:1KHz、 0.3V、 100Ts 。(Remark:Testing conditon for AL:1KHz、 0.3V、 100Ts.)

以上为本公司标准规格, 可根据客户特殊要求进行设计。(The above is the usually type, we can redesign according to costomer's request.)

[江苏佰磁电子有限公司](http://www.baici-mag.com) www.baici-mag.com