

<div><div><div><div><div><div></div><div>佰磁电子</div></div><div>BAICI ELECTRONIC</div></div></div><div>江苏佰磁电子有限公司</div><div>T型高导铁氧体产品系列</div></div></div>												
<div><div><div><div><div><div></div><div></div><div></div></div><div><div></div><div></div><div></div></div><div><div></div><div></div><div></div></div></div><div>Fig. 1</div></div></div></div>												
型号 Type	尺寸 Dimenssions(mm)			有效参数 Effective Parameters				AL(nH/N ²)±30%				重量 Wt(g/set)
	ΦA	ΦB	C	C ₁ (mm ⁻¹)	Le(mm)	Ae(mm ²)	Ve(mm ³)	BH5.5	BH7	BH10	BH12	
T9*5*3	9.0±0.3	5.0±0.3	3.0±0.2	3.56	20.77	5.83	121.12	1940	2469	3527	4232	0.60
T9*5*4	9.0±0.3	5.0±0.3	4.0±0.2	2.67	20.77	7.77	161.49	2586	3292	4702	5643	0.80
T10*5*2.5	10.0±0.3	5.0±0.3	2.5±0.2	3.63	21.78	6.01	130.78	1906	2426	3466	4159	0.65
T10*5*5	10.0±0.3	5.0±0.3	5.0±0.3	1.81	21.78	12.01	261.56	3812	4852	6931	8318	1.29
T10*6*4	10.0±0.30	6.0±0.30	4.0±0.20	3.08	24.07	7.83	188.44	2248	2861	4087	4904	0.93
T10*6*5	10.0±0.30	6.0±0.30	5.0±0.20	2.46	24.07	9.79	235.55	2810	3576	5108	6130	1.17
T12*6*4	12.0±0.30	6.0±0.30	4.0±0.20	2.27	26.13	11.53	301.31	3050	3882	5545	6654	1.49
T12.7*7.9*6.35	12.7±0.40	7.9±0.30	6.35±0.30	2.08	31.17	14.96	466.27	3316	4220	6029	7235	2.31
T14*8*7	14.0±0.30	8.0±0.30	7.0±0.30	1.60	32.82	20.46	671.46	4309	5484	7835	9402	3.32
T14*9*5	14.0±0.30	9.0±0.30	5.0±0.30	2.84	34.98	12.30	430.19	2430	3093	4418	5302	2.13
T16*8*7	16.0±0.40	8.0±0.30	7.0±0.30	1.29	34.84	26.91	937.42	5337	6793	9704	11645	4.64
T16*9.5*6.3	16.0±0.40	9.5±0.30	6.3±0.30	1.91	38.30	20.02	766.61	3613	4598	6568	7882	3.79
T16*10*7	16.0±0.40	10.0±0.30	7.0±0.30	1.91	39.37	20.62	811.82	3619	4606	6580	7896	4.02
T16*12*8	16.0±0.40	12.0±0.30	8.0±0.30	2.73	43.38	15.89	689.34	2532	3222	4603	5523	3.41
T18*10*7	18.0±0.40	10.0±0.30	7.0±0.30	1.53	41.55	27.21	1130.43	4526	5760	8229	9875	5.60
T18*10*10	18.0±0.40	10.0±0.40	10.0±0.30	1.07	41.55	38.87	1614.89	6466	8229	11756	14107	7.99
T18*12*6	18.0±0.40	12.0±0.40	6.0±0.30	2.58	45.86	17.76	814.21	2676	3406	4866	5839	4.03
T18*12*8	18.0±0.40	12.0±0.40	8.0±0.30	1.94	45.86	23.67	1085.61	3568	4541	6487	7785	5.37
T19*13*6	19.0±0.40	13.0±0.40	6.0±0.30	2.76	49.08	17.79	872.89	2505	3188	4554	5465	4.32
T19*13*11	19.0±0.40	13.0±0.40	11.0±0.30	1.51	49.08	32.61	1600.31	4592	5844	8349	10019	7.92
T20*10*7	20.0±0.40	10.0±0.40	7.0±0.30	1.29	43.55	33.63	1464.72	5337	6793	9704	11645	7.25
T20*10*10	20.0±0.40	10.0±0.40	10.0±0.30	0.91	43.55	48.05	2092.45	7625	9704	13863	16636	10.36
T20*12*8	20.0±0.40	12.0±0.40	8.0±0.30	1.54	48.14	31.31	1507.54	4495	5721	8173	9808	7.46
T20*12*10	20.0±0.40	12.0±0.40	10.0±0.30	1.23	48.14	39.14	1884.43	5619	7152	10217	12260	9.33
T22*14*6.35	22.0±0.40	14.0±0.40	6.35±0.30	2.19	54.67	24.97	1365.17	3157	4018	5740	6888	6.76
T22*14*8	22.0±0.40	14.0±0.40	8.0±0.30	1.74	54.67	31.46	1719.90	3977	5062	7232	8678	8.51
T22*14*10	22.0±0.40	14.0±0.40	10.0±0.30	1.39	54.67	39.33	2149.88	4972	6328	9040	10848	10.64
T22*14*12.7	22.0±0.40	14.0±0.40	12.70±0.30	1.09	54.67	49.94	2730.34	6314	8036	11480	13777	13.52
T25*15*10	25.0±0.40	15.0±0.40	10.0±0.30	1.23	60.18	48.93	2944.42	5619	7152	10217	12260	14.57
T25*15*12	25.0±0.40	15.0±0.40	12.0±0.30	1.03	60.18	58.71	3533.31	6743	8582	12260	14712	17.49
T25*15*13	25.0±0.40	15.0±0.40	13.0±0.30	0.95	60.18	63.60	3827.75	7305	9297	13281	15938	18.95
T25*15*15	25.0±0.40	15.0±0.40	15.0±0.30	0.82	60.18	73.39	4416.63	8429	10727	15325	18390	21.86
T28*14*6.3	28.0±0.50	14.0±0.40	6.3±0.30	1.44	60.97	42.38	2583.76	4804	6114	8734	10480	12.79
T28*16*13	28.0±0.50	16.0±0.40	13.0±0.30	0.86	65.64	76.00	4988.00	8003	10185	14550	17460	24.69
T29*19*13	29.0±0.50	19.0±0.40	13.0±0.30	1.14	73.20	64.04	4687.55	6047	7696	10994	13193	23.20
T29*19*15	29.0±0.50	19.0±0.40	15.0±0.30	0.99	73.20	73.89	5408.71	6977	8880	12686	15223	26.77
T31*19*11	31.0±0.50	19.0±0.50	11.0±0.4	1.17	75.49	64.70	4883.90	5924	7539	10770	12924	24.18
T31*19*13	31.0±0.50	19.0±0.50	13.0±0.4	0.99	75.49	76.46	5771.88	7001	8910	12728	15274	28.57
T31*19*15	31.0±0.50	19.0±0.50	15.0±0.4	0.86	75.49	88.22	6659.86	8078	10281	14686	17624	32.97
T31*20*15	31.0±0.50	20.0±0.50	15.0±0.4	0.96	77.60	81.19	6300.71	7231	9203	13148	15777	31.19
T36*19*13	36.0±0.60	19.0±0.50	13.0±0.4	0.76	80.78	106.81	8628.65	9139	11631	16616	19939	42.71
T36*23*15	36.0±0.60	23.0±0.50	15.0±0.4	0.93	89.65	95.89	8595.89	7392	9409	13441	16129	42.55
T38*19*13	38.0±0.60	19.0±0.50	13.0±0.4	0.70	82.75	118.67	9819.89	9912	12615	18022	21626	48.61
T38*22*14	38.0±0.60	22.0±0.50	14.0±0.4	0.82	89.71	109.25	9801.55	8417	10712	15303	18364	48.52
T39.5*22.5*19.5	39.5±0.80	22.5±0.60	19.5±0.5	0.57	92.43	161.44	14922.58	12072	15364	21949	26338	73.87
T40*22*20	40.0±0.80	22.0±0.60	20.0±0.5	0.53	91.82	174.73	16044.21	13152	16739	23913	28696	79.42
T40*24*16	40.0±0.80	24.0±0.60	16.0±0.5	0.77	96.29	125.25	12060.35	8991	11442	16346	19616	59.70
T40*24*20	40.0±0.80	24.0±0.60	20.0±0.5	0.62	96.29	156.57	15075.44	11238	14303	20433	24520	74.62
T42*26*18	42.0±0.80	26.0±0.60	18.0±0.5	0.73	102.83	141.27	14526.52	9496	12085	17265	20718	71.91
T45*25*12	45.0±0.80	25.0±0.60	12.0±0.5	0.89	103.87	116.60	12111.70	7759	9875	14107	16928	59.95
T45*26*17	45.0±0.80	26.0±0.60	17.0±0.5	0.67	106.12	157.51	16715.50	10258	13056	18651	22381	82.74
T45*26*20	45.0±0.80	26.0±0.60	20.0±0.5	0.57	106.12	185.31	19665.30	12068	15360	21943	26331	97.34
T47*27*15	47.0±0.60	27.0±0.50	15.0±0.4	0.76	110.49	146.22	16156.00	9146	11641	16629	19955	79.97
T48*30*15	48.0±0.60	30.0±0.50	15.0±0.4	0.89	118.12	132.54	15656.49	7755	9870	14100	16920	77.50
T49*34*16	49.0±0.8	34.0±0.60	16.0±0.50	1.07	127.52	118.67	15133.02	6432	8186	11695	14034	74.91

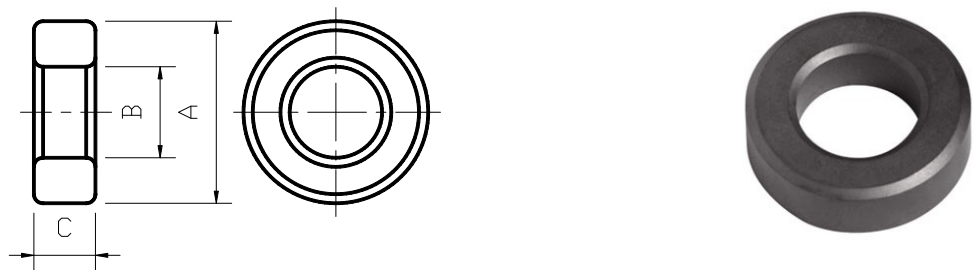


Fig. 1

型号 Type	尺寸 Dimenssions(mm)			有效参数 Effective Parameters				AL(nH/N ²)±30%				重量 Wt(g/set)
	ΦA	ΦB	C	C ₁ (mm ⁻¹)	Le(mm)	Ae(mm ²)	Ve(mm ³)	BH5.5	BH7	BH10	BH12	
T50*25*20	50.0±0.8	25.0±0.60	20.0±0.50	0.45	108.88	240.23	26155.67	15249	19408	27726	33271	129.47
T50*30*20	50.0±1.0	30.0±0.80	20.0±0.60	0.62	120.36	195.71	23555.38	11238	14303	20433	24520	116.60
T50*31*19	50.0±1.0	31.0±0.80	19.0±0.60	0.69	122.51	177.10	21697.54	9991	12716	18165	21798	107.40
T51*31*26	51.0±1.0	31.0±0.80	26.0±0.60	0.49	123.63	254.70	31489.22	14238	18121	25888	31065	155.87
T56*26*20	56.0±1.0	26.0±0.60	20.0±0.50	0.41	116.98	285.71	33423.29	16880	21483	30690	36828	165.45
T56*28*20	56.0±1.0	28.0±0.80	20.0±0.60	0.45	121.94	269.05	32809.68	15249	19408	27726	33271	162.41
T56*32*18	56.0±1.0	32.0±1.0	18.0±0.60	0.62	131.27	210.45	27625.84	11080	14102	20146	24175	136.75
T56*36*20	56.0±1.0	36.0±1.0	20.0±0.60	0.71	139.92	196.78	27532.41	9720	12371	17673	21208	136.29
T60*36*20	60.0±1.5	36.0±1.0	20.0±0.60	0.62	144.43	234.85	33919.74	11238	14303	20433	24520	167.90
T60*38*20	60.0±1.5	38.0±1.0	20.0±0.60	0.69	148.71	216.21	32153.89	10049	12789	18270	21924	159.16
T63*38*25	63.0±1.5	38.0±0.8	25.0±0.5	0.50	152.09	305.93	46528.22	13903	17694	25277	30333	230.31
T65*38*20	65.0±1.5	38.0±0.8	20.0±0.5	0.59	154.28	263.61	40668.31	11810	15030	21472	25766	201.31
T66*43*28	66.0±1.5	43.0±0.8	28.0±0.5	0.52	166.09	317.12	52669.74	13196	16795	23993	28792	260.72
T68*44*25	68.0±1.5	44.0±0.8	25.0±0.5	0.58	170.49	295.31	50347.78	11971	15236	21766	26119	249.22
T80*50*20	80.0±1.5	50.0±1.5	20.0±0.50	0.67	196.87	294.54	57987.00	10340	13160	18800	22560	287.04
T85*55*25	85.0±1.5	55.0±1.5	25.0±0.50	0.58	213.12	369.13	78668.40	11971	15236	21766	26119	389.41
T85.7*55.6*24.4	87.5±1.5	55.6±1.5	24.4±0.50	0.57	217.26	382.58	83118.55	12171	15490	22129	26554	411.44

注:AL值测试条件:1KHz、 0.3V。(Remark:Testing conditon for AL:1KHz、 0.3V.)

以上为本公司标准规格，可根据客户特殊要求进行设计。(The above is the usually type, we can redesign according to costomer's request.)

江苏佰磁电子有限公司 www.baici-mag.com