

Fig. 1

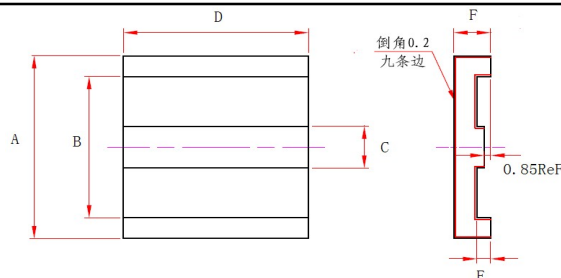


Fig. 2



型号 Type	图号 Fig.	尺寸 Dimensions(mm)						有效参数 Effective Parameters				L(mH)±30%				重量 Wt
		A	B	C	D	E	F	$C_1(\text{mm}^{-1})$	Le(mm)	Ae(mm ²)	Ve(mm ³)	BH5.5	BH7	BH10	BH12	
EE25.4镜面	1	25.5±0.4	10.2±0.4	6.35±0.3	6.35±0.3	18.9 min	6.9±0.4	1.25	49.50	39.60	1960.20	/	/	/	1	10
EEW22镜面	2	22.0±0.4	17.0±0.4	5.0±0.4	20.0±0.4	1.5±0.4	4.0±0.3	0.26	25.85	100.00	2585.00	/	/	/	2	13

注:L值测试条件:1KHz、0.3V。(Remark:Testing conditon for L:1KHz、0.3V.)

以上为本公司标准规格,可根据客户特殊要求进行设计。(The above is the usually type, we can redesign according to costomer's request.)