


DS型功率铁氧体产品系列

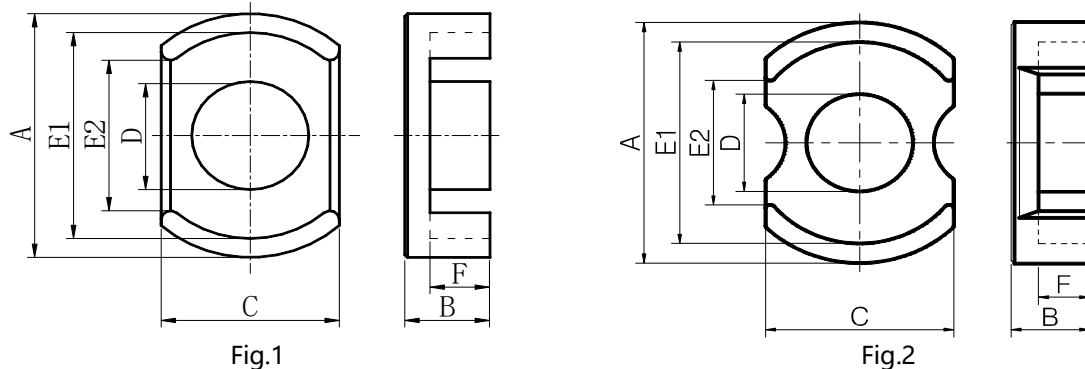

规格Type	图形Fig	尺寸Dimensions(mm)							有效参数Effective parameter				电感系数 AL(nH/N ²)		重量(克/付)
		A	B	C	D	E1	E2	F	C1(mm ⁻¹)	Ae(mm ²)	Le(mm)	Ve(mm ³)	BP44	BP95	Wt(g/set)
DS(POT)2816	1	28.0±0.5	8.1±0.2	19.0±0.4	11.1±0.2	22.2min	15.40min	5.20±0.2	0.38	107.00	41.60	4451.20	5200±25%	6800±25%	27.80
DS(POT)3012	1	30.0±0.6	6.0±0.2	20.3±0.4	13.3±0.2	25.0min	18.20min	3.20±0.2	0.29	122.10	36.00	4395.60	6500±25%	9000±25%	26.10
DS(POT)3016	1	30.0±0.6	8.1±0.2	20.3±0.4	13.3±0.2	25.0min	18.20min	5.30±0.2	0.36	122.50	43.60	5341.00	6000±25%	7800±25%	32.40
DS(POT)3019	1	30.0±0.6	9.55±0.2	20.3±0.4	13.3±0.2	25.0min	18.20min	6.75±0.2	0.40	122.70	48.90	6000.03	5700±25%	7200±25%	35.70
DS(POT)3030-1	1	30.0±0.6	15±0.2	20.3±0.4	13.3±0.2	25.0min	18.20min	12.2±0.2	0.55	126.60	69.36	8781.00	4000±25%	5300±25%	49.60
DS(POT)3216	1	31.8±0.5	8.50±0.2	20.2±0.4	13.3±0.2	26.3min	19.30min	5.50±0.2	0.36	128.30	46.01	5903.08	5500±25%	6800±25%	35.30
DS(POT)3312	1	33.3±0.5	6.10±0.15	23.7±0.4	13.5±0.2	26.3min	18.50min	3.25±0.2	0.25	147.00	36.95	5430.10	7000±25%	9800±25%	35.00
DS(POT)3313	1	33.3±0.5	6.50±0.15	23.7±0.4	13.5±0.2	26.3min	18.50min	3.75±0.2	0.26	147.40	38.20	5630.68	6500±25%	8200±25%	36.85
DS(POT)3316	1	33.3±0.5	8.50±0.15	23.7±0.4	13.5±0.2	26.8±0.4	18.50min	5.70±0.2	0.30	148.40	44.50	6603.80	6000±25%	7800±25%	42.10
DS(POT)3319	1	33.2±0.5	9.55±0.15	23.7±0.4	13.5±0.2	26.8±0.4	18.50min	6.75±0.2	0.35	147.40	51.40	7576.36	5800±25%	7200±25%	45.70
DS(POT)3414	1	34.0±0.5	7.15±0.2	23.7±0.4	13.5±0.2	27.0min	19.60min	4.35±0.2	0.28	147.00	41.55	6107.40	6500±25%	8500±25%	38.00
DS(POT)3419	1	34.0±0.5	9.50±0.2	23.7±0.4	13.5±0.2	27.0min	19.60min	6.60±0.2	0.35	147.40	52.00	7664.80	5500±25%	7200±25%	44.80
DS(POT)3719	2	37.0±0.6	9.60±0.2	27.5±0.45	15.4±0.25	30.7±0.5	20.0±0.5	6.30±0.2	0.28	189.00	52.50	9922.50	10000±25%	12000±25%	56.80
DS(POT)4020	1	39.8±0.5	10.10±0.2	28.3±0.35	16±0.25	32.7min	20.00min	6.50±0.2	0.27	208.00	55.80	11606.4	7800±25%	9200±25%	69.30
DS(POT)4027	1	39.8±0.5	13.75±0.2	28.3±0.35	16±0.25	32.7min	20.00min	10.15±0.2	0.33	208.00	69.20	14393.6	6500±25%	7800±25%	83.80

注: AL值测试条件:1KHz、0.3V、100Ts。(Remark:Testing conditon for AL:1KHz、0.3V、100Ts.)

以上为本公司标准规格,可根据客户特殊要求进行设计。(The above is the usually type, we can redesign according to costomer's request.)